



Description

Pedestal made of high durability plastic material (base and tip - PE, body - PVC and HDPE plate) with concrete base (approximate assembly weight: 14.5 kg) and molded plates in the round (diameter - 45 cm), square (45 x 45 cm), rectangular (45 x 22.5 cm) or arrow (45 x 22.5 cm) shapes, and flashing tips with led lights and solar recharging.

Application

Signaling, flow guidance, isolation and demarcation of areas with the most diverse information in outdoor environments.


Differentials

Single-piece molded plate in high-durability polyethylene, which can be manufactured in different colors involving the pedestal body, which promotes excellent (unbreakable) fall resistance and weather exposure. It allows the customization of the stickers on the faces according to the specific needs of each customer, regardless of the requested quantity. Base manufactured in one single piece, without a cover at the bottom, which does not allow the leakage of concrete residues which fill the base, besides not promoting scratches to the floor with rivets and screws in the base, as occurred in most of the options available in the market. Weather resistant, stainless, and a design far superior to all the others on the market.

Flashing Assembly

Bayer polycarbonate lens, 4 high-brightness LEDs (360-degree view), SCHOTT (German) power pickup plate, and 800mAh battery with estimated life of over 3 years.

As for operation after 8 hours of sun exposure, we will have a full recharge for a period of approximately 54 hours flashing, the assembly has a light sensor which turns the LEDs on and off according to the ambient lighting (starts flashing in the late afternoon and automatically shuts off at dawn).

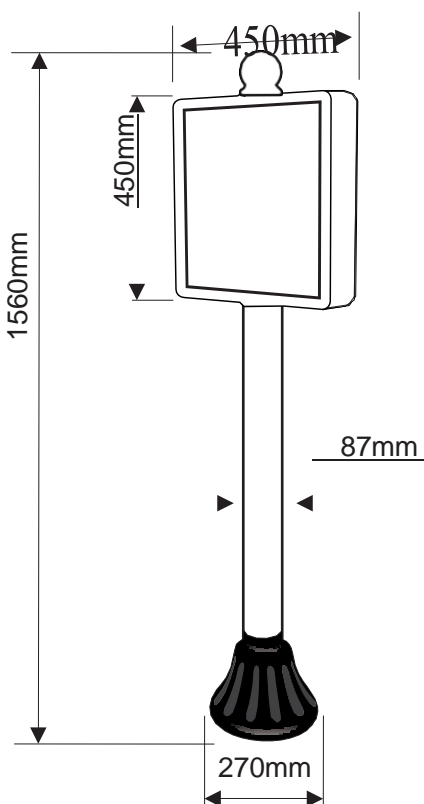

Weight 15Kg

